

107-14

Non-Recessed Drinking Fountain



Fountain bowl and optional cover plate shown in stainless steel satin finish with a "Soft Touch" button valve* and bubbler* in mirror finish

*"Hands Free" option available

Dimensions in drawing subject to options selected.

Features

- 14" diameter, 16 ga. fountain bowl
- · No plastic parts
- 100% made in the USA
- · Manufactured with lead-free materials
- · Integral drain in bowl for ease of cleaning
- ½" steel support arm and wall bracket capable of supporting 500 lbs.
- Optional cover plate and access panel to match bowl finish or choose from unlimited powder coat colors
- Options include sensor activation, vandal proof screws, bottle fillers, bottle counters, finishes, bubbler valves, and more...


Recommended Add-ons

Chiller

Equip your fountain with a Filtrine point-ofuse or remote chiller to cool your drinking water. We can help you select the most economical chiller model to fit your demand.

Purifier

Ensure that your drinking water is of the highest quality by adding a Filtrine Taste Master[®] purifier cabinet underneath the fountain or a remote purification system serving all fountains in the building.

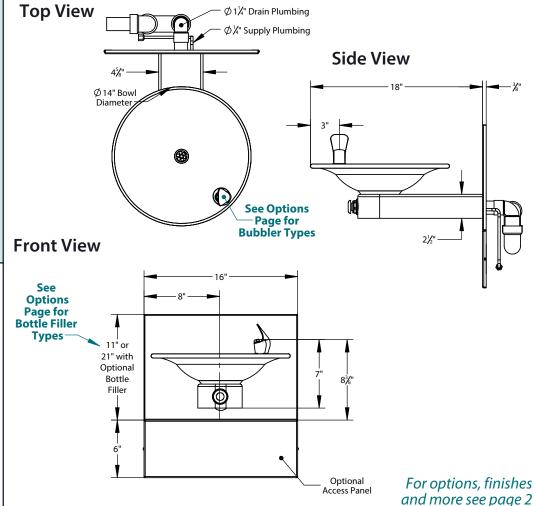







Filtrine Mfg. Co. · 15 Kit St. Keene, NH 03431 USA 800-930-3367 · 603-352-5500 · FAX 603-352-0330 www.filtrine.com · drinkingwater@filtrine.com






107-14 Options Page [EB] REVISED 3/29/2021



Model 107-14 Drinking Water Installation Drawing

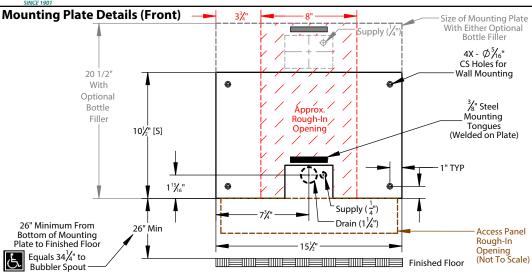

Approximate Rough-In Dimensions (hatched, left)

Model	Height	Width
Standard Plate	10½"	8"
Bottle Filler Plate	201/2"	8"


Approximate Access Panel Rough-In

Model	Height	Width
Standard Panel	5½" *	14½"

*If height specified, rough-in height will be ½" less than specified height

All views shown are for typical installation of 107-14. Views, dimensions and diagrams may change for specific installation requirements.

Exploded On-Wall Installation View 107-14 with Access Panel

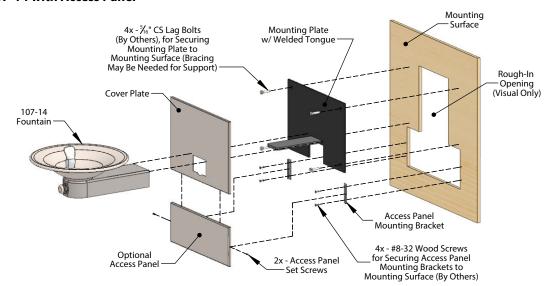


Typical Assembly Instructions (Always Install Per Local Code)


- 1. Cut rough opening as shown above and install blocking or fixture carrier as required to support the assembly.
- 2. If optional access panel was ordered cut a separate rough opening (table, top right) extending below the fountain mounting plate.
- 3. Run drain pipe to center of openings on mounting plate and install drain trap in wall per local code.
- 4. Run supply water line with service valve, if necessary.
- 5. If optional bottle filler is included with order, attach piping assembly provided by Filtrine to the back side of the mounting plate with two screws and rubber gasket for standard bottle filler and flare connection for vandal proof bottle filler.
- Fasten mounting plate over rough opening with \$\(\frac{5}{6} \) countersunk lag
 bolts with bottom of plate 26" above the floor to meet ADA fountain
 height requirement of 34\(\frac{7}{4} \) to the bubbler spout.
- Install cover plate over the mounting plate for on-wall installations. Cover plate not required for in-wall installation.
- Slide each fountain and vandal proof bottle filler arm (if ordered) over the horizontal tongues protruding from the mounting plate and fasten arms with set screws pushing slightly against the cover plate or finished wall.
- 10. Connect drain line to slip coupling and connect water connection.
- 11. If your model includes the access panel, measure, mark and install the included "L" brackets with #8-32 screws and align panel to cover plate with alignment pins.

Two Methods for Mounting Model 107-14 to Wall


On-wall Mounting Detail With Cover Plate



Behind-wall Mounting Detail Without Cover Plate





Access Panel Mounting Brackets Installation Details



Section View of Top of Mounting Bracket Assembly

Typical Drain Plumbing Detail (In-Wall Plumbing Provided By Others, Install Per Local Code) **Back View** Top View (Cropped)





(LEAD)



107-14 Installation Drawing [EB] REVISED

MADE IN USA

FILTRINE IS ISO 9001:2015 CERTIFIED PRODUCT LINE 📵 APPROVED 🌔 MARK AVAILABLI

Filtrine Mfg. Co. · 15 Kit St. Keene, NH 03431 USA 800-930-3367 · 603 352-5500 · FAX (603) 352-0330 www.filtrine.com · drinkingwater@filtrine.com

3/29/2021

1¼" Slip Coupling for Connection of

Drain Plumbing