

## 107-16

## **Non-Recessed Vandal Proof Drinking Fountain**





\*Hands Free" option available

Fountain support arm, optional bottle filler, access panel, "Soft Touch" button valve\*, and bubbler\* shown in standard stainless steel satin finish

#### **PRODUCT COMPLIANCE\***

ADA Compliance Buy America Act CA Proposition 65

Components: CA NSF/ANSI 372-2011 (Lead Free)

\*More available on request

Options and finishes may differ from image shown.

Dimensions in drawing subject to options selected.

#### **Features**

- 16" diameter, 16 ga. fountain bowl
- No plastic parts
- 100% made in the USA
- Manufactured with lead-free materials
- Integral drain in bowl for ease of cleaning
- 1/4 " steel support arm and wall bracket capable of supporting 500 lbs.
- Cover plate and access panel to match bowl finish or choose from unlimited powder coat colors
- 16 ga. plate secured with tamperresistant screws for added security
- Standard 6" access panel
- Options include sensor activation, bottle fillers, bottle counters, finishes, bubbler valves, and more...

#### **Recommended Add-ons**


#### **Chiller**

Equip your fountain with a Filtrine point-of-use or remote chiller to cool your drinking water. We can help you select the most economic chiller model to fit your demand.


#### Purifier

Ensure that your drinking water is of the highest quality by adding a Filtrine Taste Master® purifier cabinet underneath the fountain or a remote purification system serving all fountains in the building.


#### **Top View**



#### **Front View**



# Side View



For options, finishes and more see page 2

Filtrine Mfg. Co. • 15 Kit St. Keene, NH 03431 USA 800-930-3367 • 603-352-5500 • FAX 603-352-0330 www.filtrine.com • drinking water@filtrine.com









## **Filtrine Drinking Water Non-Recessed Fountain Options**

[S] - Standard

& - ADA Compliant



"Soft Touch" Button and Projector Bubbler with **Recessed Set Screws** 

16 ga. Plate Secured with Tamper-Resistant Screws for Added Security





#### ☐ Bottle Counter\*

- Digital display of approximate number of bottles saved through filler usage
- \*Only available with "Hands Free" units

☐ Bottle Rest



☐ "Hands Free" **Sensor Activated Bottle Filler** 

- Features automatic shutoff (20 sec)
- Helps prevent vandalism and water waste

## Power Supply Options:


(Choose only one)

- ☐ Connect 12v Transformer to A/C Power Supply [S]
- ☐ Use 12v Wall Plug

120/60/1 Voltage Required

□ "Hands Free" Sensor Activated **Bubbler** 

#### **Standard Bubbler Controls**



- Mounted 10½" above fountain bowl
- Requires larger cover plate
- Comes standard with tamper proof screws
- Supply plumbing for filler provided by Filtrine

Optional Bottle Fillers (Choose only one optional filler) "Soft Touch" Button Vandal Proof Filler " "Soft Touch" Button F-520 Bottle Filler

· Located above fountain for reduced

splash and one handed operaton



\*Hands Free options available



\*Hands Free options available

#### Other options are available, please contact the factory for more choices.

**Access Panel:** □6" Access Panel [S]

☐ No Access Panel

Custom Access Panel:

Vandal Proof Option: ☐ Yes [S]

## **Bubbler Options:**



☐ F-507

All finish options available



☐F-501



☐ F-501-L



**Available in:** Stainless Steel, Oil-Rubbed Bronze, or Any Powder Coat **Options** 

Fountain Finish (Check One)

Satin Stainless [S] ☐ Satin Bronze ☐ Statuary Bronze ☐ Oil-Rubbed Bronze ☐ Oil-Rubbed Bronze Powder Coat ☐ Powder Coat

Optional Cover Plate Finish (Check One)

Satin Stainless [S] ☐ Satin Bronze ☐ Statuary Bronze ☐ Oil-Rubbed Bronze ☐ Oil-Rubbed Bronze Powder Coat ☐ Powder Coat



Satin Stainless Steel [S]



**Satin Bronze** 





Statuary Bronze Oil Rubbed Bronze



Oil Rubbed Bronze **Powder Coat** (Applied to Stainless Steel)



**Powder Coat** 

Filtrine Mfg. Co. • 15 Kit St. Keene, NH 03431 USA 800-930-3367 • 603-352-5500 • FAX 603-352-0330 www.filtrine.com • drinking water@filtrine.com










## **107-16 Installation Drawings**

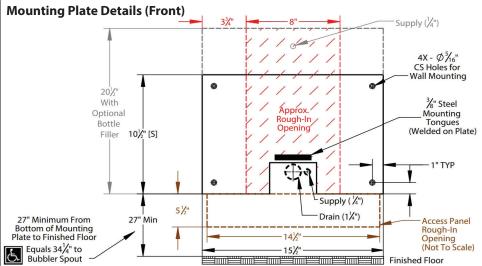

#### Mounting Plate Rough-In Dimensions (hatched, left)

MODEL	HEIGHT	WIDTH
107 Fountain	10½″	8″
107 Fountain with Bottle Filler	20½"	8″

#### **Access Panel Rough-In Dimensions** (hatched, left)

MODEL	HEIGHT	WIDTH
Standard Panel	5½"	14½"

All views shown are for typical installation

Views, dimensions and diagrams may change for specific installation requirements

## **Exploded On-Wall Installation View:** Mounting Surface – 4x - 1/6" CS Lag Bolts (By Others), for Securing Mounting Plate to Mounting Surface (Bracing May Be Needed for Support) 107-16 Mounting Plate / Welded Tongue Cover Plate Rough-In Optional — Opening (Visual Only) 107-16 Access Panel Access Panel Mounting Bracket 4x - #8-32 Wood Screws for Securing Access Panel Mounting Brackets to Mounting Surface (By Others) 2x - Access Panel Set Screws


#### Typical Assembly Instructions (Always Install Per Local Code)

- 1. Cut rough opening for fountain, bottle filler, and access panel as 6. Install cover plate over the mounting plate for on-wall shown above and install blocking or fixture carrier as required to support the assembly.
- 2. Run drain pipe to slip coupling unions (shown below) and install drain trap in wall per local code.
- 3. Run supply water with service valve, if necessary (shown below).
- 4. If optional bottle filler is included with order, attach piping assembly provided by Filtrine to the back side of the mounting plate with two screws and rubber gasket for standard bottle filler and flare connection for vandal proof bottle filler.
- 5. Fasten mounting plate over rough opening with 5/16" countersunk lag bolts with bottom of plate 27" above the floor to meet ADA fountain height requirement.


- installations.
- 7. Slide each fountain and vandal proof bottle filler arm (if ordered) over the horizontal tongues protruding from the mounting plate and fasten arms with set screws pushing slightly against the cover plate or finished wall.
- 8. Connect drain line to slip coupling and connect water connection.
- 9. If your model includes the access panel, measure, mark and install the included "L" brackets with #8-32 screws and align panel to cover plate with alignment pins.

## **On-Wall Mounting Detail With Cover Plate** Cover Plate **Mounting Plate** (Behind Cover Plate) **Behind-Wall Mounting Detail Without Cover Plate** Mounting Plate Behind Wall —

### **Access Panel Mounting Brackets Installation Details**



## Typical Drain Plumbing Detail (In-Wall Plumbing Provided by Others, Install Per Local Code)

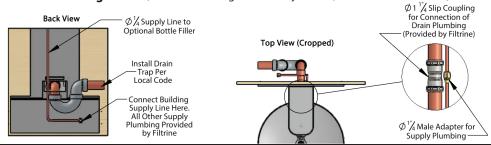

Filtrine Mfg. Co. • 15 Kit St. Keene, NH 03431 USA 800-930-3367 • 603-352-5500 • FAX 603-352-0330 www.filtrine.com • drinking water@filtrine.com





